



RO1519

Stormbuster Classic Waterproof Parka

TICKING ALL BOXES

PROTECTION LEVEL:
ARC 3
25.9 cal/cm²
Above shown is the ATPV value.
BODY BURN INJURY
PREDICTION
4.4%
Body burn prediction of 2nd + 3rd degree burns.

EN SAFETY STANDARDS




EN ISO 13688:2013


 EN ISO 14116:2015
 Outer face index 1
 Inner face index 3

 EN
 13034:2005+A1:2009
 Type PB [6]

 EN 343:2019
 4/4/X


Body burn injury prediction

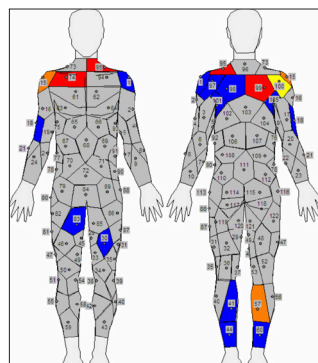

Burning wound

No

Pain (9,6%)

 1st degree (0,9%)

 2nd degree (1,8%)

 3rd degree (2,6%)

 2nd + 3rd degree burn:
 (4,4%)

Above shown body burn scores are without FR underwear.
 Visit www.roots-original.com/burn-injury-predictions for more information.

QUICK DETAIL OVERVIEW

Available colours

Navy

Product code

RO1519

Sizing

XS - 6XL

Fabric weight

 Parka: 250 g/m² + 185 g/m²

This garment is mostly used in > Renewables / Utilities / Petrochemicals / Transport



RO1519

Stormbuster Classic Waterproof Parka

FEATURES & BENEFITS

- Flame retardant retroreflective tape** > Stay visible in any situation
- 2 radio / gas detector loops** > Chest storage with easy access
- 2 chest pockets** > Double the storage space
- 2 front pockets** > Ambidextrous rear storage space
- Detachable hood** > Always space for a ruler
- Fabric tested** > According to IEC 61482-1-1 result ATPV 25.9 cal/cm²

KEY FEATURES



Treated FR fabric



Detachable hood



Triple stitched

2 radio / gas
detector loops

Highly visible

FABRIC INFORMATION

Fabric composition

SBCWP + FLA185 - 99% FR polyester / 1% antistatic

Fabric weight

250 g/m² + 185 g/m²

FR Fabric Type

Treated

Additional certification



- Oeko-Tex Standard 100
- AS/NZ 4399:1996 Sun protective clothing
UPF 50+ (Excellent Protection)

Please visit www.roots-original.com/certificates to download all relevant certificates.

Logo

Certified for logo applications

Product care instructions

To preserve the fabrics strength and protective capacity, we strongly advice to follow our detailed care instructions.

- Always launder with coverall zippers closed.
- Remove all tools from pockets
- Rinse properly after wash.
- Never wash flame retardant clothing with detergents containing bleach.
- After washing, tumble dry at 50°C to avoid excessive shrinkage.
- Do not iron directly over heat seal logos.



Whenever in doubt or in need of advice, ask your dry cleaner or contact us. We are here to help or visit www.roots-original.com/product-care



YOUR ARC FLASH PROTECTION SPECIALISTS

Get in contact, we'd love to help you!

Give us a call on +31 (0)10 2955 955 or drop us a message at: info@roots-original.com