



RO15095 Kermel Nordic Coverall



TICKING ALL BOXES

PROTECTION LEVEL:
ARC 2

9.3 cal/m²

Above shown is the ATPV value.

BODY BURN INJURY PREDICTION


23.9%

Body burn prediction of 2nd degree burns.

EN SAFETY STANDARDS

EN ISO 13688:2013	EN 1149-5:2018	EN ISO 11611:2015 Class 1 A1 A2 (A1 = 50 washing cycles)
EN ISO 11612:2015 A1A2 B1 C1 D0 E0 F1 (A1 = 50 washing cycles)	EN 13034:2005 + A1:2009 Type 6	IEC 61482-2:2009 ATPV 9.3 cal/cm ² Class 1 (50 washing cycles)

Body burn injury prediction

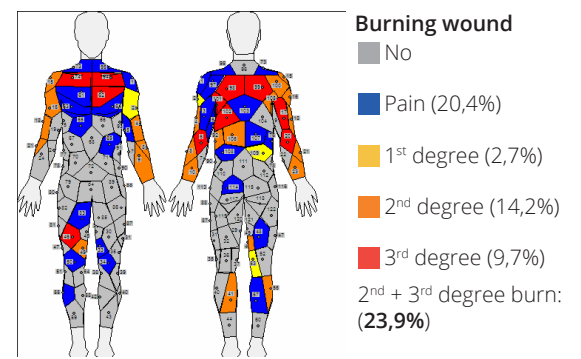

Above shown body burn scores are without FR underwear.
Visit www.roots-original.com/burn-injury-predictions for more information.

QUICK DETAIL OVERVIEW

Available colours

- Navy
- Orange

Product code

RO15095

Sizing

UK36 - UK56

Fabric weight

Coverall: 230 g/m²

Inside leg length

Short: 29"
Regular: 31"
Tall: 33" (standard size)




RO15095 Kermel Nordic Coverall

FEATURES & BENEFITS

- Flame retardant retroreflective tape > Stay visible in any situation
- Central YKK nylon zipper with studs at the top > Secure closure
- 2 chest pockets with YKK zippers > Double storage, secure closure
- 2 radio / gas detector loops > Keep your instruments within reach
- 2 side pockets with trouser access > Double storage, easy access
- 2 back pockets with flap > Double storage with easy access
- Pen pocket on left sleeve > Always have a pen in reach
- Rule pocket on right leg > Keep your ruler in each
- Knee pockets > Place for your kneepads

KEY FEATURES

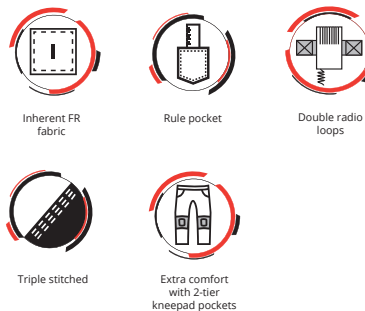

Related products



RO8008 - Kneepads
Pair of foam ROOTS knee pads for extra comfort.

FABRIC INFORMATION

Fabric composition

Kermel Alpha 4975 - 50% Kermel aramid / 25% modacryl protex / 24% tencel / 1% antistatic

Fabric weight

230 g/m²

FR Fabric Type

Inherent

Logo

Certified for logo applications

Industrial laundry

Fabric meets the industrial wash programme

Product care instructions

To preserve the fabric's strength and protective capacity, we strongly advise to follow our detailed care instructions.

1. Always launder with coverall zippers closed.
2. Remove all tools from pockets
3. Rinse properly after wash.
4. Never wash flame retardant clothing with detergents containing bleach.
5. After washing, tumble dry at 50°C to avoid excessive shrinkage.
6. Do not iron directly over heat seal logos.

*** 7H: @**

Whenever in doubt or in need of advice, ask your dry cleaner or contact us. We are here to help or visit www.roots-original.com/product-care

Please visit www.roots-original.com/certificates to download all relevant certificates.



YOUR ARC FLASH PROTECTION SPECIALISTS

Get in contact, we'd love to help you!

Give us a call on +31 (0)10 2955 955 or drop us a message at: info@roots-original.com