



RO26095HV
Hepta Hi-Vis Coverall



TICKING ALL BOXES

PROTECTION LEVEL:
ARC 2

ELIM 6.4 cal/m²
ATPV 8.1 cal/m²

Protection level refers to HRC/ARC category

EN SAFETY STANDARDS



EN 1149-5:2018



EN ISO 11612:2015
 A1 B1 C1 D0 E0 F1
 (A1=100 washing cycles)



EN ISO 11611:2015
 A1 Class 1
 (A1=100 washing cycles)



EN IEC 61482-2:2020
 APC 1 (4 kA)
 ELIM 6.4 cal/cm²
 ATPV 8.1 cal/cm²



EN 13034:2005+A1:2009
 Type 6



EN ISO 20471
 :2013+A1:2016
 (100 washing cycles)
 Class 3



RIS-3279-TOM
 Issue 2 2019
 Orange only
 (100 washing cycles)



ISO 6330
 Domestic laundry
 100 wash cycles



ISO 15797
 Industrial laundry
 100 wash cycles

EN ISO 13688:2013

QUICK DETAIL OVERVIEW

Available colours

Hi-vis Yellow/Navy Hi-vis Orange/Navy

Product code

RO26095HV

Sizing

UK36 - UK60

Fabric weight

Hepta: 270 g/m²
 Kermel Alpha: 230 g/m²

Inside leg length

Short: 29"
 Regular: 31"
 Tall: 33" (standard size)




RO26095HV Hepta Hi-Vis Coverall

FEATURES & BENEFITS

- Flame retardant retroreflective tape > Stay visible in any situation
- Extremely high visibility fabric > Visibility taken to extremes
- Central nylon YKK zip with press studs > Easy to open and close
- Two chest pockets with flap > Double storage space, secure closure
- Two radio / gas detector loops > Keep your instruments within reach
- Two side pockets with trouser access > Doubling leg storage
- Pen pocket on left sleeve > Keep an easily reachable pen on you
- Mandarin styled collar > For better neck protection
- Adjustable cuffs > Ensuring proper tightness of the sleeves

KEY FEATURES

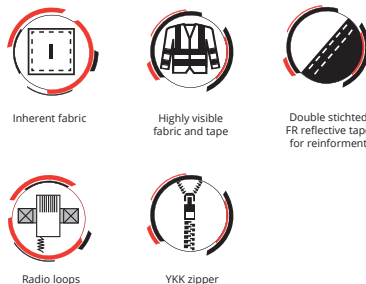

FABRIC INFORMATION

Fabric composition

Hepta 270® - 34% Polyester / 25% Lenzing FR® / 19% Kermel® / 13% Modacryl / 5% Para-aramid / 3% Polyamide / 1% Carbon
Kermel Alpha 4975 - 50% kermel aramid / 25% modacryl protex / 24% tencel / 1% antistatic

Fabric weight

270 g/m² + 230 g/m²

FR Fabric Type

Inherent

Additional certification



- Oeko-Tex Standard 100
- AS/NZ 4399:1996 Sun protective clothing UPF 50+ (Excellent Protection)

Please visit www.roots-original.com/certificates to download all relevant certificates.

Logo

Certified for logo applications

Product care instructions

Fabrics are fit for 100 cycles domestic laundry (ISO 6330 - 60°C) and 100 cycles industrial laundry (ISO 15797 - 75°C). To preserve the fabrics strength and protective capacity, we strongly advice to follow our detailed care instructions.

- Always launder with coverall zippers closed.
- Remove all tools from pockets
- Rinse properly after wash.
- Never wash flame retardant clothing with detergents containing bleach.
- After washing, tumble dry at 50°C to avoid excessive shrinkage.
- Do not iron directly over heat seal logos.



Whenever in doubt or in need of advice, ask your dry cleaner or contact us. We are here to help or visit www.roots-original.com/product-care



YOUR ARC FLASH PROTECTION SPECIALISTS

Get in contact, we'd love to help you!

Give us a call on +31 (0)10 2955 955 or drop us a message at: info@roots-original.com